Micro distribution boxes ROSP IP54, handle

- Distribution boxes with handle have been designed to be part of mobile wiring.
- Distribution boxes do not require any maintenance after installation.
- Cover resistant against excessive heat and fire (650 °C glow wire test).
- In case of combination of 16 A and 32 A sockets additional protection with F10 A / 250 V tube fuses.
- Dimensions 192 x 190 x 117 mm (h x w x d).

Complies with standards:	STN EN 61439-1, STN EN 61439-3
Mechanical resistance of box:	IK10
Degree of protection:	IP54
Material:	ABS
Nominal working voltage:	400 V~, 250 V~, 50/60 Hz
Operating temperature:	-25 °C to +55 °C



200318

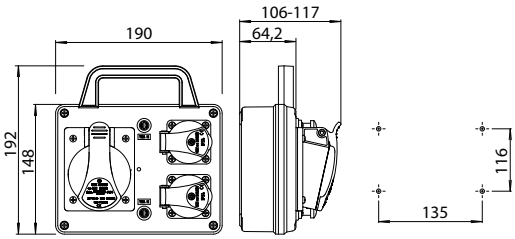

Ord. No. (Type)	Layout	CEE 400 V 5P		CEE 400 V 4P		250 V		Protection	Connection	InA	Pkg (pcs.)
		32 A	16 A	32 A	16 A	16 A Fr	16 A Sch	Tube fuse			
200310 (ROSP 4VZ D)		-	-	-	-	4	-	-	3 x 2,5 mm² Pg 16	InA 16 A	1
200311 (ROSP 4VZ D/S)						-	4				
200312 (ROSP 6VZ D)		-	-	-	-	6	-	-	3 x 2,5 mm² Pg 16	InA 16 A	1
200313 (ROSP 6VZ D/S)						-	6				
200314 (ROSP 1632 D)		-	1	-	-	1	-	-	5 x 2,5 mm² Pg 16	InA 16 A	1
200315 (ROSP 1632 D/S)						-	1				
200316 (ROSP 3232 D)		1	-	-	-	1	-	1 x F10 A/250 V	5 x 4 mm² Pg 21	InA 32 A	1
200317 (ROSP 3232 D/S)						-	1				
200318 (ROSP 1631 D)		-	1	-	-	2	-	-	5 x 2,5 mm² Pg 16	InA 16 A	1
200319 (ROSP 1631 D/S)						-	2				
200320 (ROSP 3231 D)		1	-	-	-	2	-	2 x F10 A/250 V	5 x 4 mm² Pg 21	InA 32 A	1
200321 (ROSP 3231 D/S)						-	2				
200322 (ROSP 1630 D)		-	-	-	1	2	-	-	5 x 2,5 mm² Pg 21	InA 16 A	1
200323 (ROSP 1630 D/S)						-	2				
200324 (ROSP 3230 D)		-	-	1	-	2	-	2 x F10 A/250 V	5 x 4 mm² Pg 21	InA 32 A	1
200325 (ROSP 3230 D/S)						-	2				

InA = Rated current of switchgear and control gear assembly